# (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

## (19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 8 July 2004 (08.07.2004)

PCT

## (10) International Publication Number WO 2004/056485 A1

- (51) International Patent Classification7: B01L 7/00, 3/00
- (21) International Application Number:

PCT/SE2003/001953

(22) International Filing Date:

15 December 2003 (15.12.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 0203781-0

19 December 2002 (19.12.2002)

- (71) Applicant (for all designated States except US): ALPHA-HELIX AB [SE/SE]; Uppsala Science Park, S-751 83 Uppsala (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): MALMQVIST, Mats [SE/SE]; Hurtigs Gata 63, S-754 39 Uppsala (SE). SVANVIK, Nicke [SE/SE]; Rörstrandsgatan 33A, S-113 40 Stockholm (SE). JOHNANDER, Fredrik [SE/SE]; Holmsvägen 21, S-589 37 Linköping (SE).


- (74) Agents: STRANDIN, Heléne et al.; Bergenstråhle & Lindvall AB, Box 17704, S-118 93 Stockholm (SE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

#### Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

#### (54) Title: HOLDER AND METHOD FOR COOLING OR HEATING SAMPLES

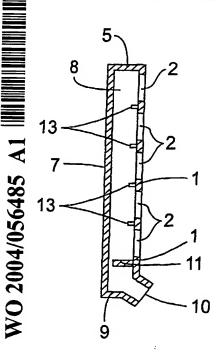

(57) Abstract: A holder for a microtitreplate or an array of separate test tubes comprising a first panel (1) provided with a recess (2) for receiving each well (3) of the microtitreplate or test tubes and a second panel (7), which together with the first panel (1) and three side walls (5) form an inner space (8). The fourth side (9) comprises an inlet (10) for gas or liquid, whereby the gas or liquid entering the inner space (8) via the inlet (10) leaves the inner space (8) via said recesses (2), along the outside of the wells (3). A method for cooling or heating samples contained in wells (3) of a microtitreplate or an array of separate test tubes by inserting the microtitreplate or array of separate test tubes into such a holder and letting gas or liquid enter said inner space (8).

HOLDER AND METHOD FOR COOLING OR HEATING SAMPLES

The present invention concerns a holder for a microtitreplate or for an array of separate test tubes and a method for cooling or heating samples contained in the wells of a microtitreplate or an array of separate test tubes.

#### Background

10

15

5

In order to speed up chemical testing procedures there is an increasing demand for making manifold analyses in parallel. In typical cases such parallel analyses are performed in an array of separate test tubes or in different wells of a single unit called a microtitre plate.

A problem with such an approach arises during incubation, that is, when the samples are heated or cooled to desired reaction temperatures, which use to be referred to as "well-to-well uniformity". The problem is to expose the separate tubes or wells uniformly for the heating and cooling medium, often a gas or a liquid and to obtain homogeneous temperature within this medium.

25

30

The major source of poor thermal uniformity is the temperature gradients commonly established from the edges to the center of the tube array or the microtitre plate. Such gradients are more severe if the tubes or wells are obstacles for the flow of the medium, which often is the case.

#### Summary of the invention

5 The present invention aims to alleviate the above problems. The solution is provided by means of a holder according to claim 1 and a method according to claim 6.

An advantage with this is that the cooling or heating gas
or liquid is spread evenly around each well providing a
uniform heating or cooling of each sample in the
microtitreplate or test tubes of the array.

The holder and method according to the present invention 15 are especially advantageous when centrifuging microtitreplates or arrays of separate test tubes, for example, in a thermocycling device.

Tests have shown that systematic differences in

temperature in the sample when using know technique to
cool or heat samples in a microtitreplate or in an array
of separate test tubes have been eliminated when using the
present invention. Any small remaining differences are
random instead of systematic.

25

30

#### Short description of the drawings

The present invention will now be described by means of exemplifying embodiments in connection with the sketch drawings, in which:

Fig. 1 illustrates in a plan view a holder according to an embodiment of the present invention.

- Fig. 2 illustrates in a cross sectional side view the holder according to Fig. 1.
- Fig. 3 illustrates in a cross sectional side view a

  holder according to an embodiment of the present invention with a microtitreplate arranged therein.
- Fig. 4 illustrates in a plan view a detail of the holder with a microtitreplate arranged therein according to Fig. 1.
  - Fig. 5 illustrates in a cross sectional view an embodiment of a recess.
  - Fig. 6 illustrates in a cross sectional view another embodiment of a recess.

## 20 Detailed description of preferred embodiments

A holder according to the present invention comprises a first panel 1, which preferably is substantially flat and for example made of a polymer material. The first panel 1

is provided with a number of recesses 2 adapted for receiving a well 3 of a microtitreplate 12 or a separate test tube. Preferably the number of recesses 2 corresponds to the number of wells 3 in a microtitreplate 12, for example 96.

30

15

The recesses 2 may be through holes as illustrated in Figs. 1-4 or dents or funnels as illustrated in Figs. 5 and 6, respectively, having a hole in the bottom for gas or liquid to flow therethrough. Preferably the recesses 2

may have a shape of a circle, but may instead have shapes of an ellipse, square, rectangle or an octagon for example (not shown).

5 The first panel 1 has preferably a rectangular shape substantially corresponding to a microtitreplate 12. Along three of the edges 4 of the first panel 1 a side wall 5 is provided, which together with a second panel 7 forms an inner space 8 in the holder. The fourth edge 9 comprises an inlet opening 10 for cooling or heating gas or liquid.

The second panel 7 is preferably in the form of a lid, which is releasable attached, so that a microtitreplate 12 or separate test tubes may be inserted into the holder and the holder is closed by means of said lid 7 and thus forming the inner space 8, see Fig 2. The lid 7 may be positioned so as to cover all the inlets of the wells 3 or be formed by a microtitreplate 12 itself as illustrated in Fig. 3.

20

The inlet opening 10 may extend along the whole side 9 of the first panel 10 or comprise several subopenings or extend along a part of the side 9 or be adapted in a suitable way for the specific use.

25

30

When cooling or heating the samples contained in the wells 3 cold or hot gas or liquid is made to flow into the inlet 10 of the holder so that the gas or liquid will flow around the upper portions of the wells 3 and fill the inner space 8. See arrows in Fig. 3.

The gas or liquid will then flow from the inner space 8 via gaps 6 between the recesses 2 and the wells 3 and further along the outside of the wells 3, thereby cooling

or heating the samples inside the wells (3) in a homogeneous way.

In order to make sure that a gap 6 is provided between the recess 2 and the well 3, the edge may be provided with one or more protrusions 13, see Figs. 2 and 4, protruding into the middle of the recess 2 or protruding from the inner side of the first panel 1, i.e. the side facing the microtitreplate 12 when it is arranged in the holder.

10

15

In case of the recesses 2 having a shape of a ellipse, for example, the protrusions may be missed out since the wells 3 would come into contact with the recesses 2 at two points of the elongated sides of the ellipse but there would still be a gap 6 around the rest of the circumference of the well 3.

Due to this or these protrusions 13 the microtitreplate 12 or the separate test tubes arranged in an array are
20 prevented from reaching too close to the first side panel 1 so that the wells 3 would fill the whole recesses 2 and thus preventing the cooling or heating gas or liquid from flowing through the gap 6 along the outside of the wells 3.

25

30

In front of a first row of wells 3 of a microtitreplate 12 or an array of test tubes, seen in the flow direction, one or more baffles 11 may be arranged in order to spread the gas or liquid more evenly in the inner space 8 so that the first row will not be "hit" by all of the gas or liquid. See Fig. 2.

#### CLAIMS

20

- 1. A holder for a microtitreplate (12) or an array of separate test tubes, characterised in that it comprises a first panel (1) provided with a recess (2) for receiving each well (3) of the microtitreplate (12) or test tubes and a second panel (7), which together with the first panel (1) and three side walls (5) form an inner space (8), wherein the fourth side (9) comprises an inlet (10) for gas or liquid, whereby the gas or liquid entering the inner space (8) via the inlet (10) leaves the inner space (8) via said recesses (2), along the outside of the wells (3).
  - 2. A holder according to claim 1, wherein the second panel (7) is made up by the microtitreplate (12) itself.
  - 3. A holder according to claim 1, wherein the second panel (7) is a releasable lid.
- 4. A holder according to claim 1, 2 or 3, wherein at least one protrusion (13) is provided on the first panel (1) in order to secure a gap (6) between the wells (3) and the recesses (2).
- 5. A holder according to anyone of the previous claims,
  wherein at least one baffle (11) is provided in front
  of the row of wells (3) positioned closest to the
  inlet (10) for gas or liquid.

6. A method for cooling or heating samples contained in wells (3) of a microtitreplate (12) or an array of separate test tubes, characterised by inserting the microtitreplate (12) or array of separate test tubes into a holder comprising a first panel (1) provided with a recess (2) for receiving each well (3) of the microtitreplate (12) or test tubes and a second panel (7), which together with the first panel (1) and three side walls (5) form an inner space (8), wherein the fourth side (9) comprises an inlet (10) for gas or liquid, and letting gas or liquid enter said inner space (8) of the holder and further out through said recesses (2), along the outside of the wells (3).

10

5



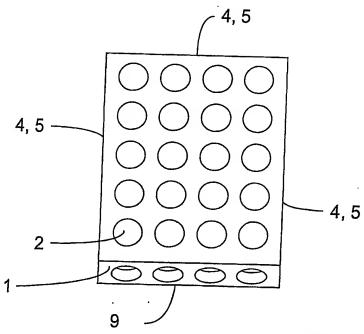


Fig. 1

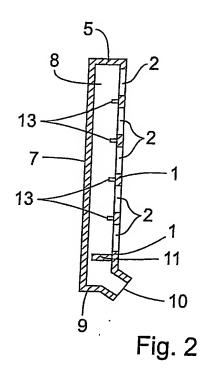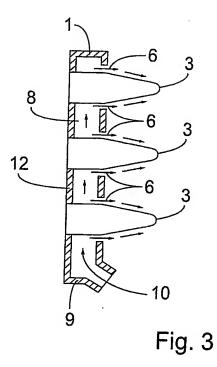

SUBSTITUTE SHEET (RULE 26)



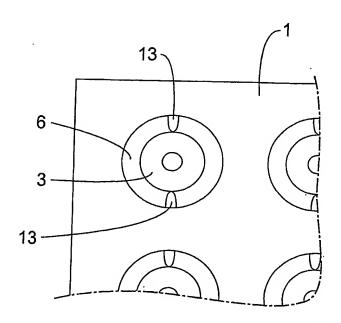


Fig. 4

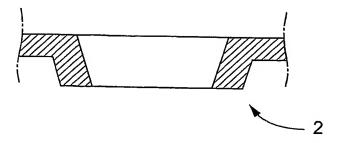


Fig. 5

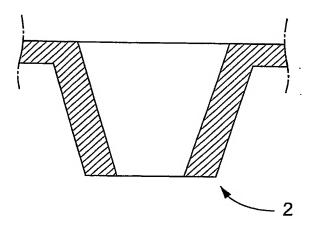


Fig. 6

#### INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2003/001953

	PCT/S	E 2003/001953				
A. CLASSIFICATION OF SUBJECT MATTER	<del></del>					
IPC7: B01L 7/00, B01L 3/00 According to International Patent Classification (IPC) or to both no	ational classification and IPC					
B. FIELDS SEARCHED						
Minimum documentation searched (classification system followed by classification symbols)						
IPC7: B01L						
Documentation searched other than minimum documentation to the	e extent that such documents are	included in the fields searched				
SE,DK,FI,NO classes as above						
Electronic data base consulted during the international search (name	e of data base and, where practice	able, search terms used)				
EPO-INTERNAL, WPI DATA, PAJ						
C. DOCUMENTS CONSIDERED TO BE RELEVANT						
Category* Citation of document, with indication, where app	propriete of the relevant nose	Poloment to alaim NI				
	· · · · · · · · · · · · · · · · · · ·	ages Relevant to claim No.				
A EP 1266691 A1 (AIC), 18 December abstract	2002 (18.12.2002),	1-6				
A US 5504007 A (JOHN L. HAYNES), 2 (02.04.1996), abstract	US 5504007 A (JOHN L. HAYNES), 2 April 1996 (02.04.1996), abstract					
A US 5942432 A (DOUGLAS H. SMITH E 24 August 1999 (24.08.1999),	US 5942432 A (DOUGLAS H. SMITH ET AL), 24 August 1999 (24.08.1999), abstract					
<del></del>						
WO 137997 A1 (GLAXO GROUP LIMITE (31.05.2001), abstract	WO 137997 A1 (GLAXO GROUP LIMITED), 31 May 2001 (31.05.2001), abstract					
Further documents are listed in the continuation of Box	C. See patent fam	ily annex.				
* Special categories of cited documents  "A" document defining the general state of the art which is not considered to be of particular relevance  "I" later document published after the international filing date or priorit date and not in conflict with the application but cited to understand the principle or theory underlying the invention						
"E" earlier application or patent but published on or after the international filing date.  "X" document of particular relevance: the claimed invention cannot considered novel or cannot be considered to involve an invention.						
special reason (as specified)  "Y"  document of particular relevance: the claimed invention cannot considered to involve an inventive step when the document is						
means combined with one or more other such documents, such combination document published prior to the international filing date but later than						
the priority date claimed  "&" document member of the same patent family  Date of the actual completion of the international search  Date of mailing of the international search						
5 March 2004	Date of mailing of the international search report  1 0 -03- 2004					
Name and mailing address of the ISA/	Authorized officer					
Swedish Patent Office Box 5055, S-102 42 STOCKHOLM	Maria Balanda					
Facsimile No. + 46 8 666 02 86	Mats Raidla/mj Telephone No. +46 8 782 25 00					
orm PCT/ISA/210 (second sheet) (January 2004)		<del></del>				

## INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 2003/001953

<u> </u>		PCT/SE 200	3/001953
	pation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages  Relevant to claim No.		
A	US 5716584 A (WILLIAM R. BAKER ET AL), 10 February 1998 (10.02.1998), abstract		1-6
}			
1			
		1	
m PCT/ISA/2	210 (continuation of second sheet) (January 2004)		

# INTERNATIONAL SEARCH REPORT Information on patent family members

24/12/2003

International application No. PCT/SE 2003/001953

EP	1266691	A1	18/12/2002	NONE
US	5504007	A	02/04/1996	NONE
US	5942432	A	24/08/1999	AT 202012 T 15/06/2001 AU 733101 B 10/05/2001 AU 9673298 A 27/04/1999 CA 2303277 A,C 15/04/1999 DE 69800937 D,T 29/11/2001 EP 1011864 A,B 28/06/2000 SE 1011864 T3 JP 2001519224 T 23/10/2001 WO 9917881 A 15/04/1999
WO	137997	A1	31/05/2001	NONE
US	5716584	A	10/02/1998	AU 6916396 A 27/03/1997 CA 2231170 A 13/03/1997 EP 0848721 A 24/06/1998 JP 11502720 T 09/03/1999 WO 9709353 A 13/03/1997

Form PCT/ISA/210 (patent family annex) (January 2004)